

# BUNN®

## 1 Gallon Digital Coffee Brewer with Portable Server

ITEM#

PROJECT

DATE



**Model Single CDF  
with 1.5 GPR**

Dimensions: 26.1"H x 8.5"W x 18.9"D  
(66.3cm H x 21.6cm W x 48cm D)

### Features

#### One Gallon Digital Coffee Brewer

- Brews 4.5 to 9.9 gallons (17.0 to 37.5 litres) of perfect coffee per hour.
- 1/2 gallon and 1 gallon (1.9 and 3.8 litre) batches brewed into 1.5 GPR portable server (server included).
- Gourmet funnel allows use of heavier throw weights of coffee.
- Coffee extraction controlled with pre-infusion, Pulse-Brew™ and digital temperature control.
- Cold brew lock-out and automatic warmer time-out ensure high quality, fresh tasting coffee.
- Front of machine programming simplifies installation.
- Electronic diagnostics and built-in tank drain make service easier.
- SplashGard® funnel deflects hot liquids away from the hand.
- Hot water faucet on all models.

For current specification sheets and other information, go to [www.bunn.com](http://www.bunn.com).

### Related Products

#### Easy Clear® EQ-17-TL

Product No. : 30200.1000

Dimensions:

12<sup>7</sup>/<sub>16</sub>" H x 2<sup>1</sup>/<sub>2</sub>" W x 3" D  
31.6 cm H x 6.35 cm W x 7.62 cm D



#### Single/Dual Filter Pack

Product No. : 20100.0000

Packed per case: 500

Dimensions: 5<sup>1</sup>/<sub>4</sub>" Base x 3<sup>3</sup>/<sub>4</sub>" Sidewall  
13.3 cm Base x 9.5 cm Sidewall



#### 1.5 GPR SS Portable Server on an RWS1 Warmer

1GPR Product No. : 20950.0004

RWS1 Product No. : 12203.0010  
(120V)

*\*Also available with side handles  
or black decor.*



RWS1A Product No. : 12203.0011  
(230V)

Model	Agency Listing	International Model	Agency Listing
Single CDF15	UL NSF	No International model	
Single CDF35	UL NSF		

Patents Apply

3/05

A2.2

## Dimensions & Specifications


Model	Product #	Volts	Amps	Tank Heater Watts	Total Watts	Brewing Capacity	Cu. Ft.	Shipping Weight	Cord Attached
Single CDF15	35000.0000	120	13.3	1425	1600	4.5 gal/hr	6.0	46.3 lb.	Yes

**Brewing capacity:** based upon incoming water temp of 60°F (140°F rise) per 1/2 gallon brew time of 4 minutes.

**Electrical:** 120 volt model requires 2-wires plus ground service rated 120V, single phase.

240 volt model requires 3-wires plus ground service rated 120/208 or 120/240V, single phase, 60 Hz.

**Plumbing:** 20-90 psi (138-621 kPa). Machine supplied with 1/4" male flare fitting.

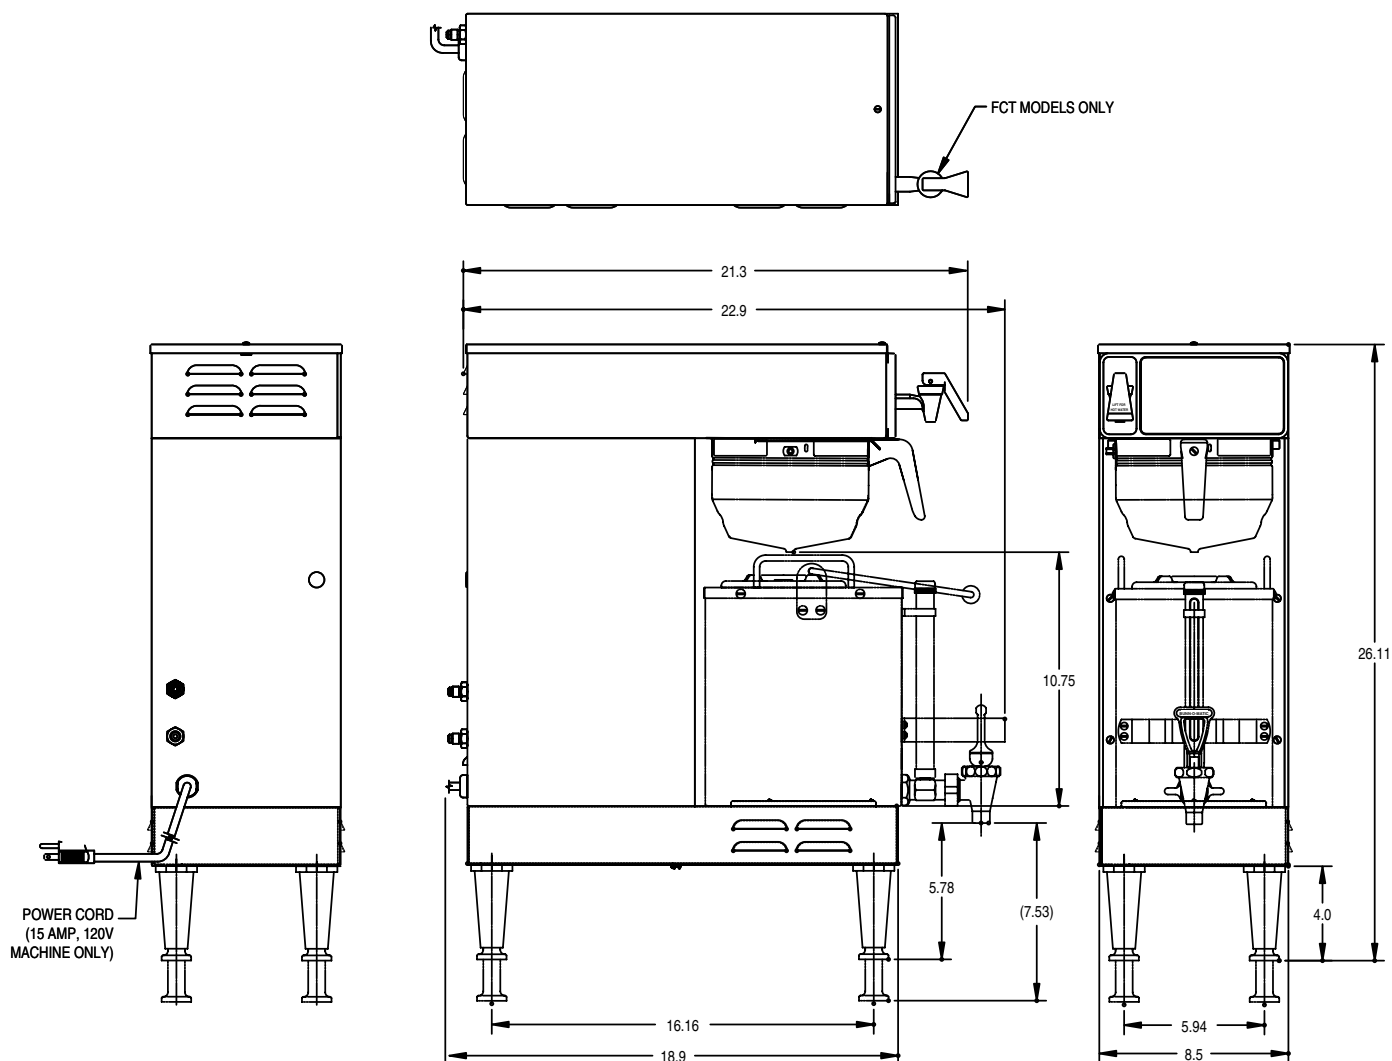

BUNN Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • 800-637-8606 • 217-529-6601 • Fax 217-529-6644 • [www.bunn.com](http://www.bunn.com)

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches. Bunn Corporation owns all copyrights relating to materials in this publication. Please contact Bunn Corporation to request permission to reproduce any portion of this publication.